

Audi RS3 / S3 8V Installation Instructions

Flap control RX1 AE2 8V Taster




Delivery:

- Vehicle specific cableset with control unit
- Extension cable set to control flaps per taster (optional)
- Unlocking tool for switch stripe (optional)

Assembly time: 30 minutes

Needed tools:

- Torx TX 20
- Torx TX 25
- Hexagon nut driver 8 mm
- Hexagon nut driver 10 mm
- interior dismantel tools



- 1 SPORT MODUS**
Die Abgasklappen werden geöffnet und somit die Lautstärke erhöht. Das Resultat ist ein sportlicher Sound.
- 2 KOMFORT MODUS**
Die Abgasklappen werden geschlossen und somit die Lautstärke reduziert.
- 3 SERIEN MODUS**
Die werkseitige Steuerung wird wiederhergestellt.



- SPORT MODUS**
Die Abgasklappen werden geöffnet und somit die Lautstärke erhöht. Das Resultat ist ein sportlicher Sound.
- KOMFORT MODUS**
Die Abgasklappen werden geschlossen und somit die Lautstärke reduziert.
- SERIEN MODUS**
Die werkseitige Steuerung wird wiederhergestellt.

- This installation Instructions is for guidance only
- Installation should only be performed by specialist personnel
- The general information on the product can be found in the enclosed information or the on-line page



1.

- Cover dismantle
- Below you will find a small groove for attachment
- The cover is only clipped!



2.

- Dismantle hood lever
- There is a lock on the backside
→ see next picture
- For dismantle remove the lock and turn the lever to the side.



3.

- Remove torx screw (TX 25)





4.

- Remove cover under the steering wheel
- 2 times screws 10 mm hexagon bolt
- One screw sideways to the door (TX 20)
- Cover is clipped only left and right from the steering wheel



5.

- Remove clips from boarding strip in the front
- Jerk upwards




6.

- Also unclip the top panel or remove it completely
- Remove the middle panel (blue arrow). To do this, move it to the rear of the car and then to the side of the footwell



7.

- Disconnect the red plug. At this point, the module is plugged on

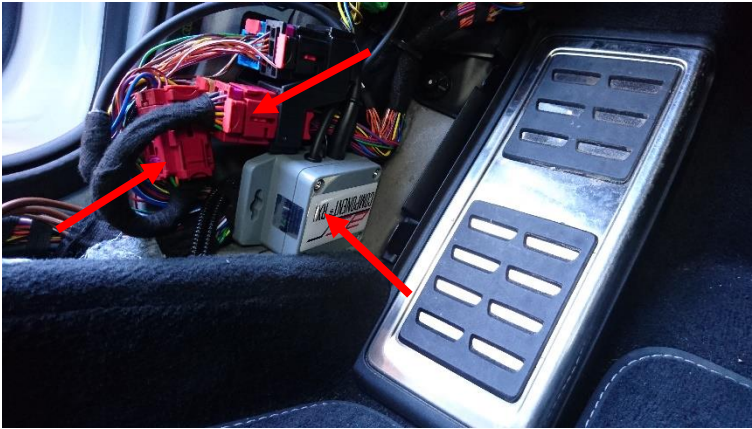


8.

- Place the module as shown in the figure
- This way, the adapter plug and the device fit behind the panel and can not move or creating noise



9.

- Route the cables for the switch strip and the earth terminal upwards and lay them behind the cable for the diagnostic interface.

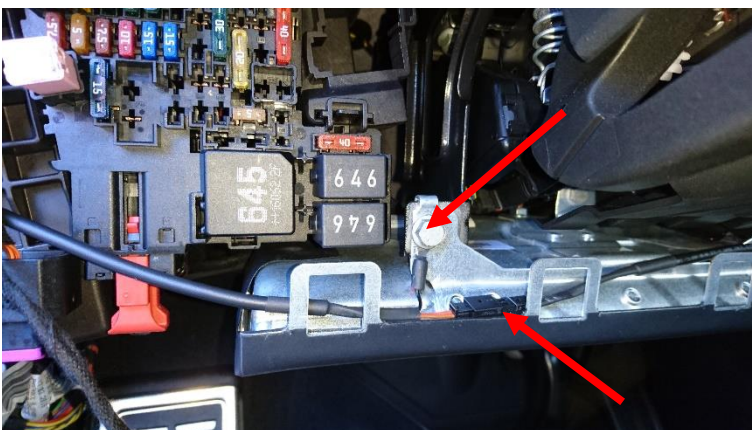

10.

- Mount the ground terminal to the screw (8 mm hex bold)
- Plug-in connection to the switch strip can be placed in the indicated position

The following steps are only necessary if you want to connect the switch strip to our device! This requires an expansion cable set and a new switch strip.



11.

- Insert the unlocking tool and pull out the switch strip
- Disconnect the connector of the switch strip



12.

- Remove the red cover from the connector. There is a small seal that must be pressed outwards



13.

- Route the cable from the drivers footwell to the switch strip



14.

- Place crimps in black connector

Switch for parking assistent (new switch strip) (PLA):

- Red: 13
- Brown: 3

If you have deactivated the start stop system you can also use the switch of it to control our module:

- Red: 12
- Brown: 2